



## SEAMING MACHINE



*K2 plus*

*K3 plus*




# SEAMING MACHINE

- Unwind Edge Guide System
- Independent Unwind, Forming and Rewind Tension Zones
- Frictionless Forming System
- Automatic Layflat Set-up
- Automatic Layflat Correction
- Direct Injection Solvent Application System
- Automatic Solvent Positioning System
- Proportional Solvent Speed Control
- Rewind Oscillation
- Fastest Set-up in the Industry

## STANDARD SPECIFICATIONS

| Model              | 300D-FS              | 350D-FS               |
|--------------------|----------------------|-----------------------|
| Unwind Width       | 620 mm               | 720 mm                |
| Unwind Diameter    | 600 mm               | 800 mm                |
| Unwind Unit        | Cantilever Air Shaft | Shaftless Unwind Unit |
| Lay Flat Width     | 40-300 mm            | 40-350 mm             |
| Rewind Diameter    | 700 mm               |                       |
| Max. Machine Speed | 500 m / min          |                       |

## MACHINE WEB PATH LAYOUT

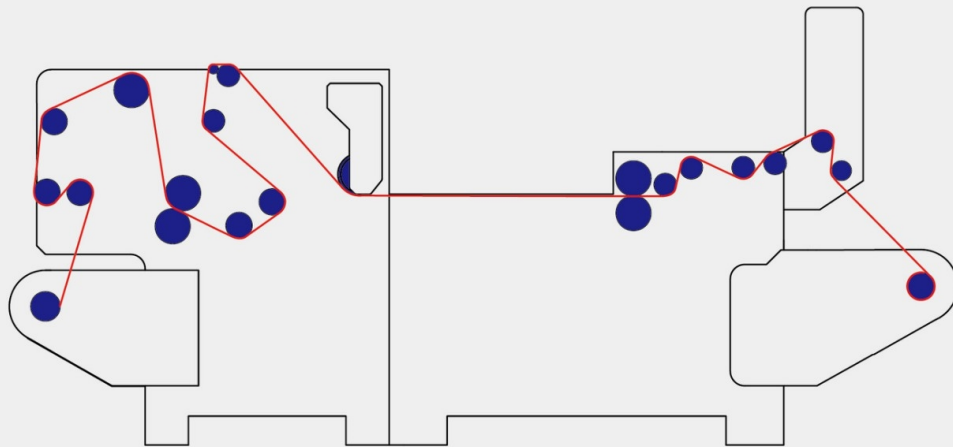

**webcontrol**

WEBCONTROL MACHINERY CORP.

No. 1, Jingke 7th Rd., Nantun Dist.,  
Taichung City 40852, Taiwan  
Tel: +886-4-23587272 Fax: +886-4-23580882  
[www.webcontrol.com.tw](http://www.webcontrol.com.tw)

**KARLVILLE**  
BEYOND CONVERTING

KARLVILLE DEVELOPMENT LLC

3600 NW 59th St., Miami, FL 33142  
Phone: +1-305-533-1051  
Fax: +1-786-329-5696  
[www.Karlville.com](http://www.Karlville.com)